

4SQ

Typical Applications


- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications


Pump

- Capacity from 0.6 to 3 (m³/h)
- Total head from 12 to 121

Motor

- Continuous service
- Power: 0.18~1.1kW (Single phase)
- Power: 0.18~1.1kW (Three phase)
- Insulation class: B
- Protection grade: IP 68
- Minimum well diameter: Φ4"
- Highest temperature of liquid: 40

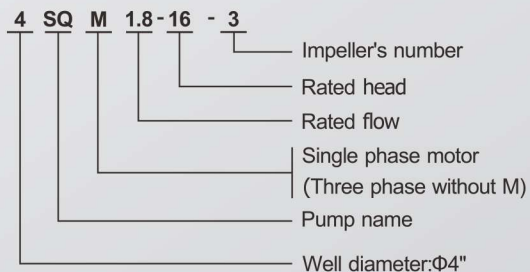

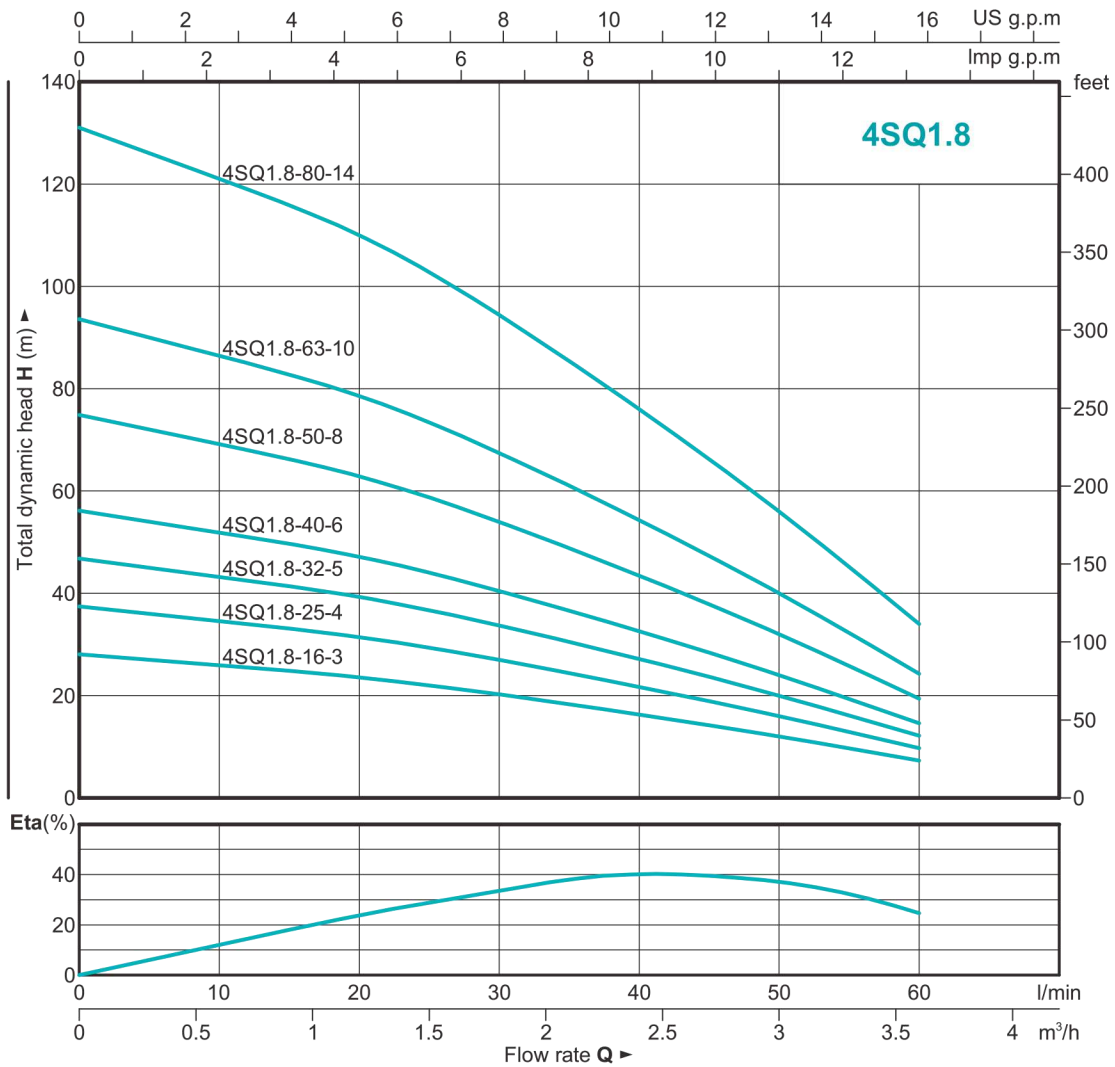

PERFORMANCE DATA 50Hz

Outlet: G1"~G1¼"

MODEL		P ₂		DELIVERY n≈2850 1/min								
1~ 220V-240V	3~ 380-415V	kW	HP	Q	m³/h l/min	0	0.6	1.2	1.8	2.4	3	3.6
						0	10	20	30	40	50	60
4SQM1.8-16-3	4SQ1.8-16-3	0.18	0.25	H(m)		28	26	24	20	16	12	7
4SQM1.8-25-4	4SQ1.8-25-4	0.25	0.33			37	35	31	27	22	16	10
4SQM1.8-32-5	4SQ1.8-32-5	0.37	0.5			46	43	39	34	27	20	12
4SQM1.8-40-6	4SQ1.8-40-6	0.55	0.75			56	52	47	40	33	24	15
4SQM1.8-50-8	4SQ1.8-50-8	0.75	1			74	69	63	54	43	32	19
4SQM1.8-63-10	4SQ1.8-63-10	0.75	1			93	86	79	67	54	40	24
4SQM1.8-80-14	4SQ1.8-80-14	1.1	1.5			130	121	110	94	76	56	34