

4SV/4NK

Typical Applications


- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

Pump

- Qmax: 2.8 (m³/h)
- Capacity from 0.6 to 2.4 (m³/h)
- Total head from 88 to 10 (m)

Motor

- Continuous service
- Power: 0.75-1.5kW
- Insulation class: B
- Protection grade: IP 68
- Minimum well diameter: Φ4"
- Highest temperature of liquid: 40°C

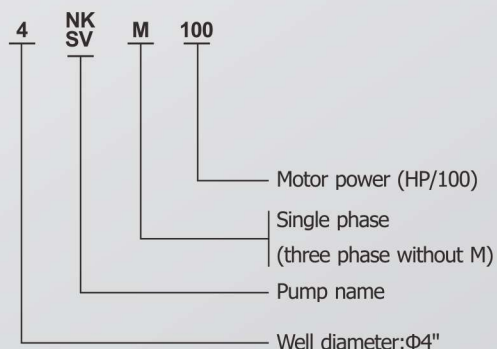


4SV



4NK

4SV/4NK

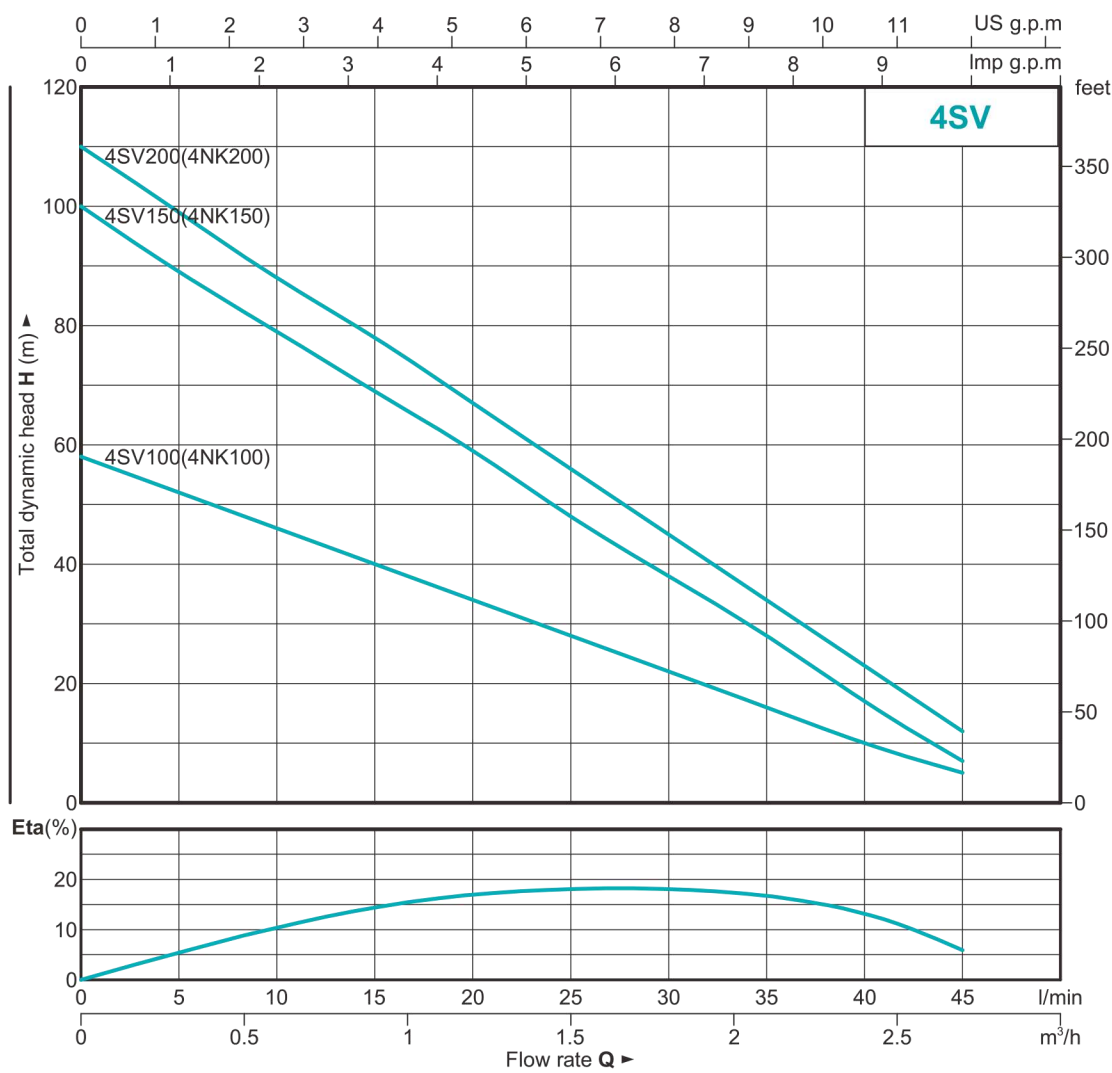

PERFORMANCE DATA 50Hz

Outlet:G1"

MODEL		P ₂		DELIVERY n≈2850 1/min											
1~ 220V-240V	3~ 380-415V	KW	HP	Q	m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7
					l/min	0	5	10	15	20	25	30	35	40	45
4SVM100	4SV100	0.75	1	H(m)		58	52	46	40	34	28	22	16	10	5
4NKM100	4NK100														
4SVM150	4SV150					100	89	79	69	59	48	38	28	17	7
4NKM150	4NK150	1.1	1.5												
4SVM200	4SV200	1.5	2			110	99	88	78	67	56	45	34	23	12
4NKM200	4NK200														