


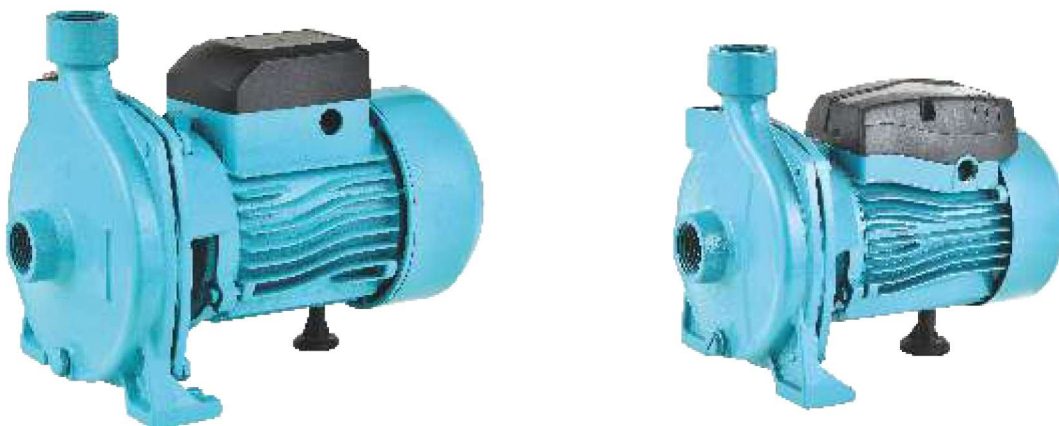

Typical Applications



- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

Motor

- Single-phase: 220-240V/50Hz
- Three-phase: 380-415V/50Hz

Operating Conditions

- Highest temperature of liquid +40°C
- Maximum sand content: 0.25%

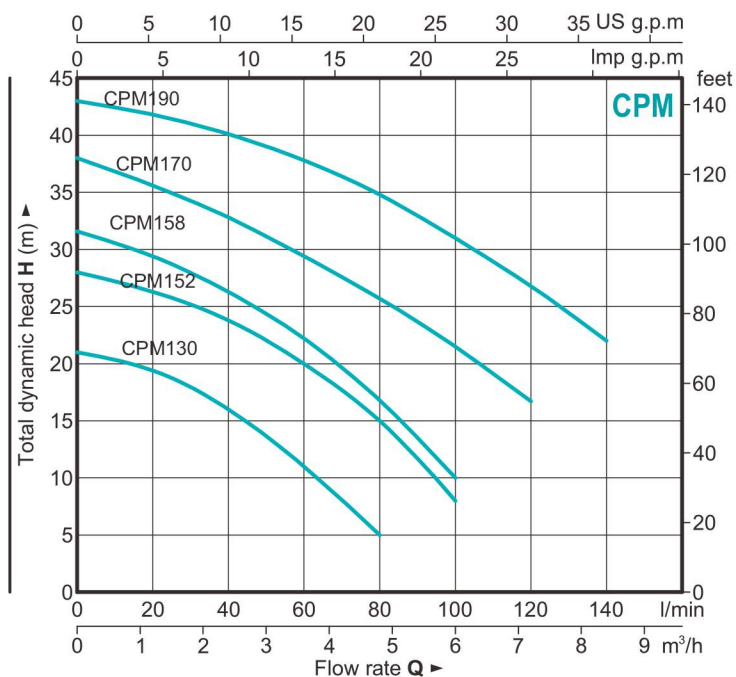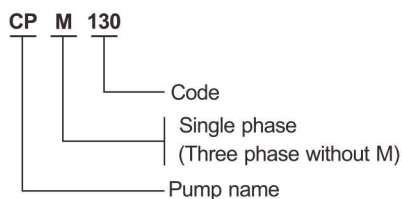

PERFORMANCE DATA 50Hz

MODEL		P ₂		DELIVERY n≈2850 1/min									
1~ 220V-240V	3~ 380-415V	KW	HP	Q	m³/h l/min	0	1.2	2.4	3.6	4.8	6	7.2	8.4
						0	20	40	60	80	100	120	140
CPM130	CP130	0.37	0.5	H(m)		21	19	16	11	5	-	-	-
CPM152	CP152	0.55	0.75			28	26	24	20	15	8	-	-
CPM158	CP158	0.75	1			32	29	26	22	16	10	-	-
CPM170	CP170	1.1	1.5			38	36	33	28	26	22	17	-
CPM190	CP190	1.5	2			43	42	40	38	35	31	27	22