



Typical Applications



- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

Motor

- Single-phase: 220-240V/50Hz
- Three-phase: 380-415 V/50Hz

Operating Conditions

- Highest temperature of liquid +40°C
- Maximum sand content: 0.25%

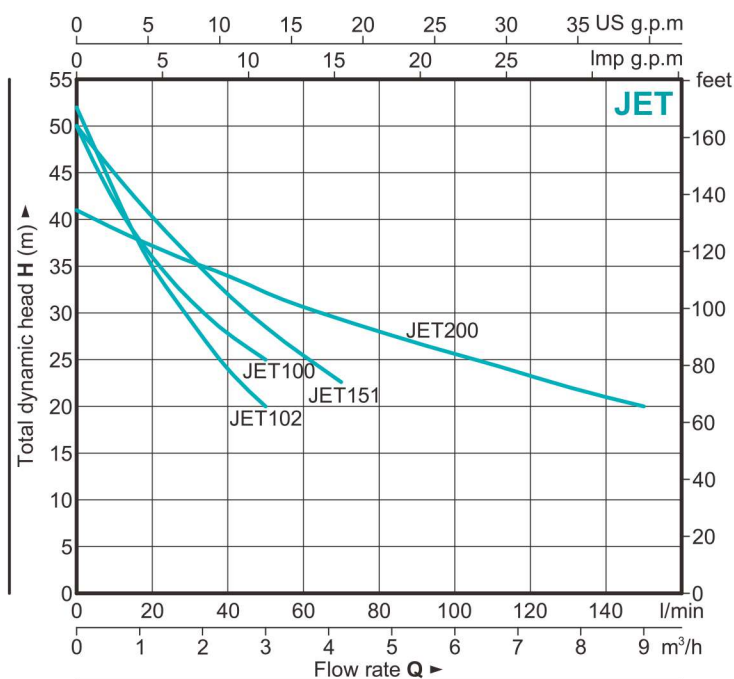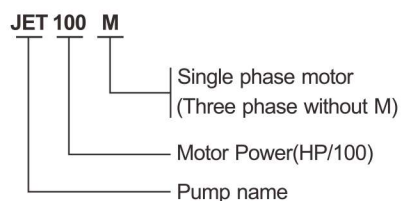

PERFORMANCE DATA 50Hz

MODEL		P ₂		DELIVERY $n \approx 2850$ 1/min												
1~ 220V-240V	3~ 380-415V	KW	HP	Q	$\frac{m^3}{h}$	0	0.6	1.2	1.8	2.4	3	4.2	5.4	6.6	7.8	9
					$\frac{l}{min}$	0	10	20	30	40	50	70	90	110	130	150
JETM100M	JET100	0.75	1	H(m)	50	42	36	31	28	25	-	-	-	-	-	-
JETM102M	JET102	0.75	1		52	43	35	29	24	20	-	-	-	-	-	-
JETM151M	JET151	1.1	1.5		50	45	40	36	32	28	23	-	-	-	-	-
JET200M	JET200	1.5	2		41	39	37	35	34	32	29	27	25	22	20	-