



Typical Applications



- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

Motor

- Single-phase: 220-240V/50Hz
- Three-phase: 380-415V/50Hz

Operating Conditions

- Highest temperature of liquid +40°C
- Maximum sand content: 0.25%

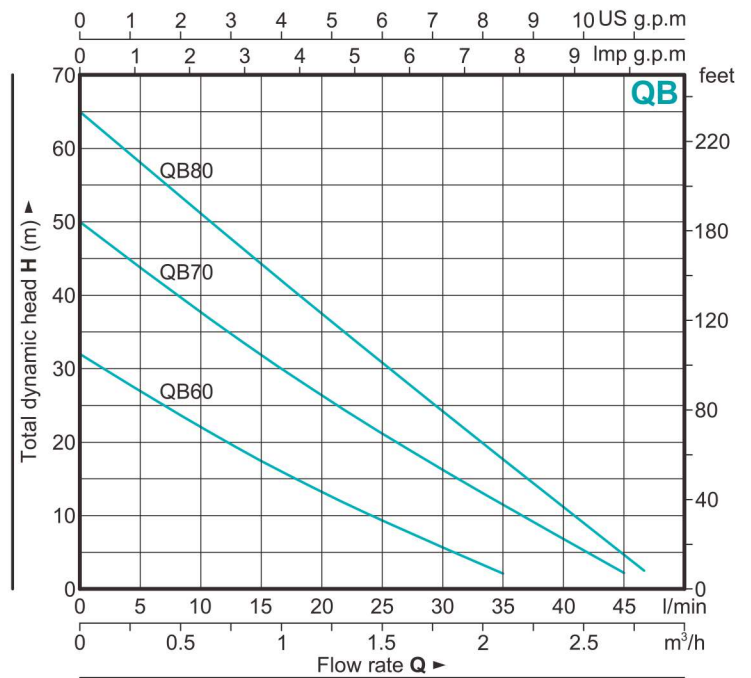

PERFORMANCE DATA 50Hz

MODEL	P ₂		Max.Flow (l/min)	Max.Head (m)	Suct (m)	InletXOutlet
	KW	HP				
QB60	0.37	0.5	35	32	8	1"X1"
QB70	0.55	0.75	45	50	8	1"X1"
QB80	0.75	1	50	65	8	1½"X1½"