

## Typical Applications

- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

## Condition Of Usage

- Continuous service
- The maximum immersion:5m
- Protection grade: IP 68
- Highest temperature of liquid: 40℃



QDX(A)



QDX(A)



QDX(B)




QDX(B)



QDX(C)

### Q D X 1.5-12-0.25 A/B

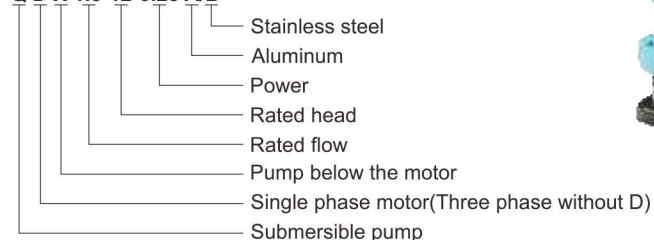

## PERFORMANCE DATA 50Hz

| MODEL          | P <sub>2</sub> |      | Outlet<br>( mm ) | Rated.Flow |                   | Rated.Head<br>(m) |
|----------------|----------------|------|------------------|------------|-------------------|-------------------|
|                | KW             | HP   |                  | l/min      | m <sup>3</sup> /h |                   |
| QDX1.5-12-0.25 | 0.25           | 0.33 | 25               | 25         | 1.5               | 12                |
| QDX1.5-16-0.37 | 0.37           | 0.5  | 25               | 25         | 1.5               | 16                |
| QDX1.5-25-0.55 | 0.55           | 0.75 | 25               | 25         | 1.5               | 25                |
| QDX3-18-0.55   | 0.55           | 0.75 | 25               | 50         | 3                 | 18                |
| QDX10-10-0.55  | 0.55           | 0.75 | 40               | 167        | 10                | 10                |
| QDX15-7-0.55   | 0.55           | 0.75 | 50               | 250        | 15                | 7                 |
| QDX1.5-32-0.75 | 0.75           | 1    | 25               | 25         | 1.5               | 32                |
| QDX8-18-0.75   | 0.75           | 1    | 40               | 133        | 8                 | 18                |
| QDX10-16-0.75  | 0.75           | 1    | 50               | 167        | 10                | 16                |
| QDX15-10-0.75  | 0.75           | 1    | 50               | 250        | 15                | 10                |
| QDX30-6-0.75   | 1.1            | 1.5  | 80               | 500        | 30                | 6                 |
| QDX14-16-1.1   | 1.1            | 1.5  | 50               | 233        | 14                | 16                |
| QDX15-14-1.1   | 1.1            | 1.5  | 65               | 250        | 15                | 14                |
| QDX40-6-1.1    | 1.1            | 1.5  | 80               | 667        | 40                | 6                 |
| QDX15-18-1.5   | 1.5            | 2    | 50/65            | 250        | 15                | 18                |
| QDX40-9-1.5    | 1.5            | 2    | 80               | 667        | 40                | 8                 |
| QDX6-32-1.5    | 1.5            | 2    | 40               | 100        | 6                 | 32                |

# QDX

