

RC



Typical Applications



- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

Motor

- Single-phase: 220-240V/50Hz
- Three-phase: 380-415V/50Hz

Operating Conditions

- Highest temperature of liquid +40°C
- Maximum sand content: 0.25%

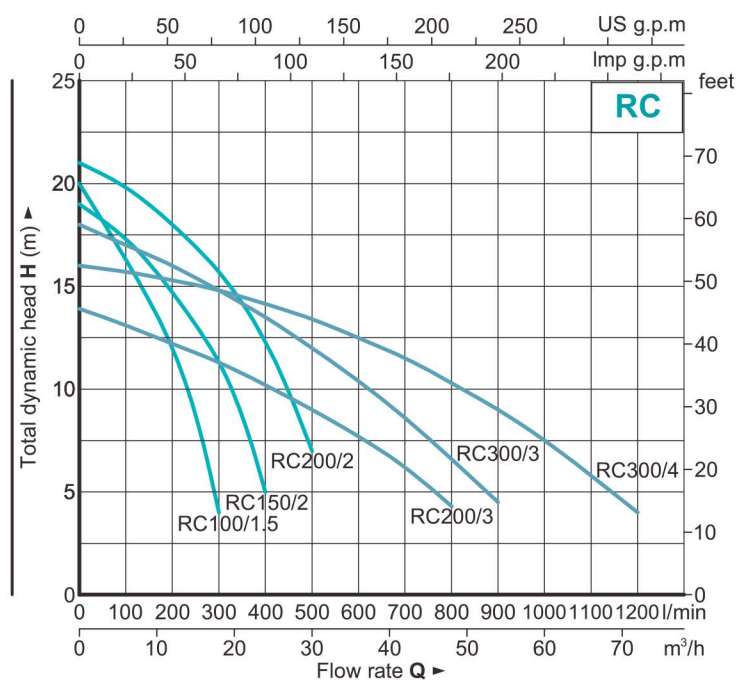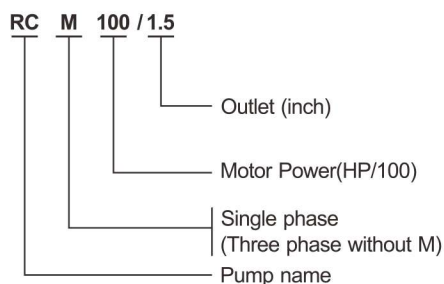

PERFORMANCE DATA 50Hz

MODEL		P ₂		DELIVERY n≈2850 1/min															
1~ 220V-240V	3~ 380-415V	KW	HP	Q	m³/h	0	6	12	18	24	30	36	42	48	54	60	66	72	
RCM100/1.5	RC100/1.5	0.75	1	H(m)	l/min	0	100	200	300	400	500	600	700	800	900	1000	1100	1200	
RCM150/2	RC150/2	1.1	1.5			20	16	12	4	-	-	-	-	-	-	-	-	-	
RCM200/2	RC200/2	1.5	2			19	17	15	11	5	-	-	-	-	-	-	-	-	
RCM200/3	RC200/3	1.5	2			21	20	18	16	12	7	-	-	-	-	-	-	-	
RCM300/3	RC300/3	2.2	3			14	13	12	11	10	9	8	6	4	-	-	-	-	
RCM300/4	RC300/4	2.2	3			18	17	16	15	14	12	10	9	7	5	-	-	-	
						16	16	15	15	14	13	13	12	10	9	8	6	4	