

SCM

Applications

- For water supply from wells or reservoirs.
- For domestic use, for civil and industrial applications.
- For garden use and irrigation.

Operating Conditions


- Maximum fluid temperature up to +35°C.
- Maximum sand content:0.25%.
- Maximum immersion:50m.
- Maximum well diameter:130mm.


Motor and Pump

- Rewindable motor
- **Three-phase:** 380V - 415V/50Hz
- **Single-phase:** 220V - 240V/50Hz
- Equip with start control box or digital auto-control box
- It's available to equip with floating swith
- Curve tolerance according to ISO9906

Warranty:1 year

- (according to our general sales conditions.)

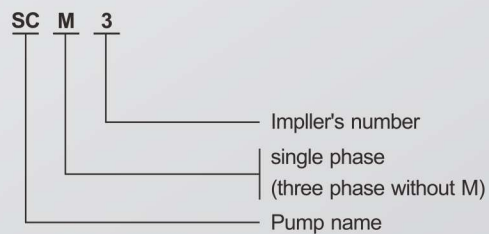

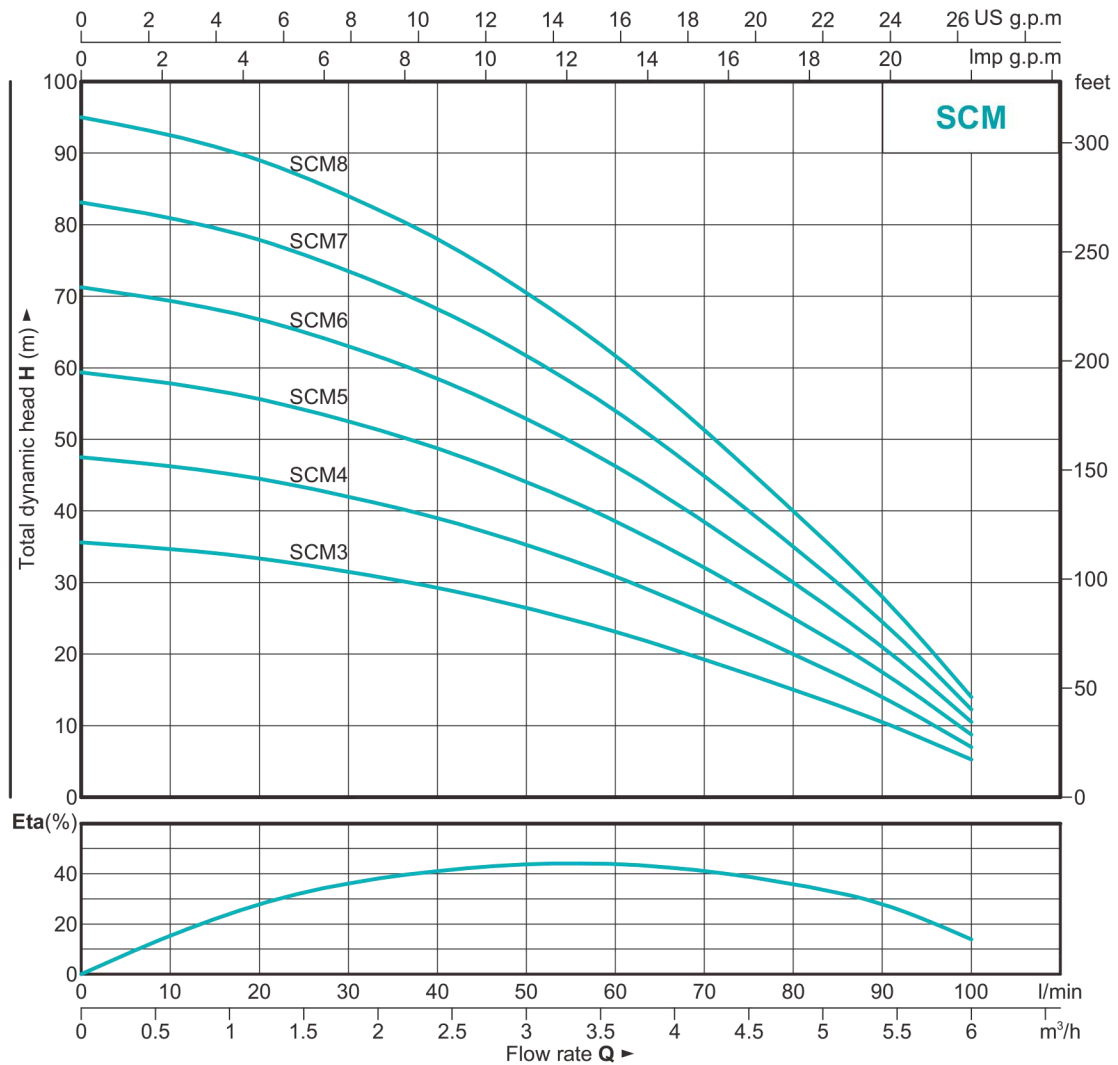

PERFORMANCE DATA 50Hz

Outlet: G1¼"

MODEL		P ₂		DELIVERY n≈2850 1/min												
1~ 220V-240V	3~ 380-415V	kW	HP	Q	m³/h	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6
					l/min	0	10	20	30	40	50	60	70	80	90	100
SCM3	SC3	0.55	0.75	H(m)		36	35	33	32	29	26	23	19	15	11	5
SCM4	SC4	0.75	1			48	46	45	42	39	35	31	26	20	14	7
SCM5	SC5	0.92	1.25			59	58	56	53	49	44	39	32	25	18	9
SCM6	SC6	1.1	1.5			71	69	67	63	59	53	46	38	30	21	11
SCM7	SC7	1.3	1.75			83	81	78	74	68	62	54	45	35	25	12
SCM8	SC8	1.5	2			95	93	89	84	78	71	62	51	40	28	14