





Typical Applications

- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

Condition Of Usage

- Continuous service
- The maximum immersion: 5m
- Protection grade: IP 68
- Highest temperature of liquid: 40°C

SPA 6-28/2-1.1 F

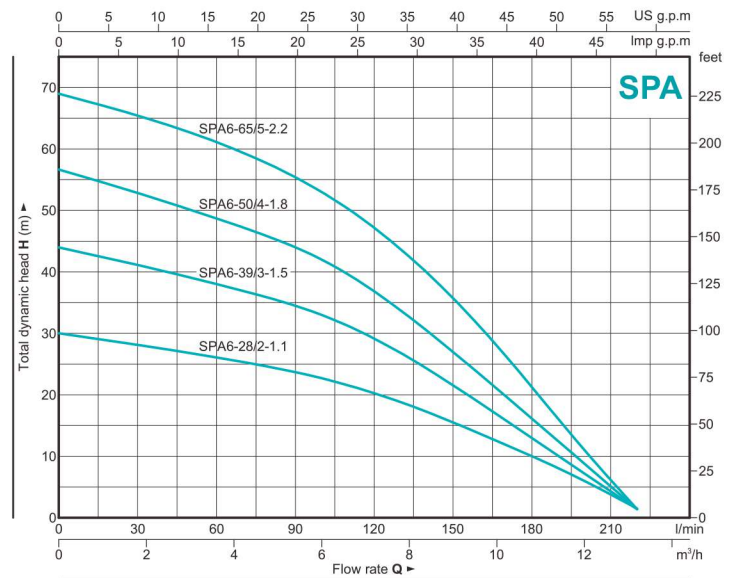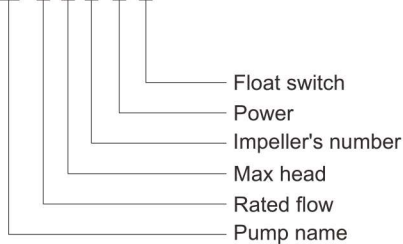

PERFORMANCE DATA 50Hz

MODEL	P ₂		Outlet (mm)	Max.Flow		Max.Head (m)
	KW	HP		l/min	m ³ /h	
SPA6-28/2-1.1F	1.1	1.5	50	220	13.2	30
SPA6-39/3-1.5F	1.5	2	50	220	13.2	44
SPA6-50/4-1.8F	1.8	2.5	50	220	13.2	56
SPA6-65/5-2.2F	2.2	3	50	220	13.2	65