



Application Fields

This series of pump is widely used in industry,agriculture,mine,building operations , environmental protection and municipalservice.The fluid contained chopped fiber,paper scraps,sands,etc.Solid granules or softness solid state fluid, such as turbid water,waste water,sewage,fecalaria, etc. Especially suitable for farm irrigation,desilting and building operations, but explosion-proof demand use is inapplicable.


Typical Applications

- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

Condition Of Usage

- Continuous service
- The maximum immersion:5m
- Insulation class: B
- Protection grade: IP 68
- Highest temperature of liquid: 40℃

Model Meaning

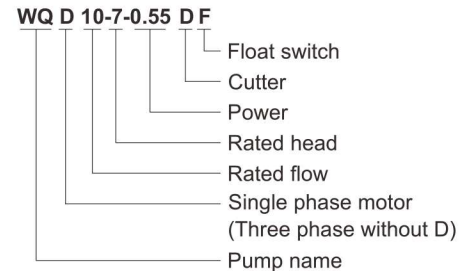

PERFORMANCE DATA 50Hz

MODEL	P ₂		Outlet (mm)	Max.Flow		Max.Head (m)
	KW	HP		l/min	m ³ /h	
WQ(D)10-8-0.55F	0.55	0.75	50	367	22	12
WQ(D)6-16-0.75F	0.75	1	40	315	19	17.5
WQ(D)10-10-0.75F	0.75	1	50	417	25	15
WQ(D)8-16-1.1F	1.1	1.5	50	380	22.8	18
WQ(D)15-10-1.1F	1.1	1.5	50	415	25	14.5
WQ15-15-1.5	1.5	2	50	400	24	19
WQ8-20-1.5	1.5	2	40	500	30	25
WQ(D)10-7-0.55DF	0.55	0.75	50	308	18.5	11
WQ(D)15-5-0.8DF	0.8	1.1	50	333	20	8
WQ(D)15-8-1.1DF	1.1	1.5	50	400	24	10.5
WQ(D)20-8-1.3DF	1.3	1.75	50	450	27	12.5

WQ(D)

